

Introduces the Process Feed Pump

Engineered for pumping shredded MSW (garbage) into pressurized vessels minimizing outside air from entering the process.


MORE
INFORMATION
888-373-3996

Systems tailored to Customer's specified feeding processes equipment.



STANDARD FEATURES:

- Packing (Sealing) Chamber
- Pump capacities from .4 ft³ per stroke to 2.8 ft³ per stroke
- > 2-1/2" Throttle Valve
- > Removable Top Covers
- > Replaceable Liners
- > Large Maintenance Access Door
- > Large Feeding Hopper to minimize bridging
- Large Cylinders
- Heavy Duty Ram
- > Stainless Steel Coating (FDA Approved)
- Open-looped, High Efficiency Hydraulic Unit
- > Large Oil Reservoir
- > Horsepower Limited Hydraulic Pumps
- > Water or Air Oil Coolers
- > UL Listed PLC Control Panel
- > Patented V-Pipe











CALL TODAY FOR MORE INFORMATION 888-373-3996

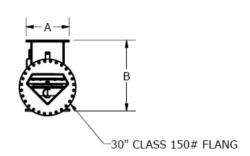

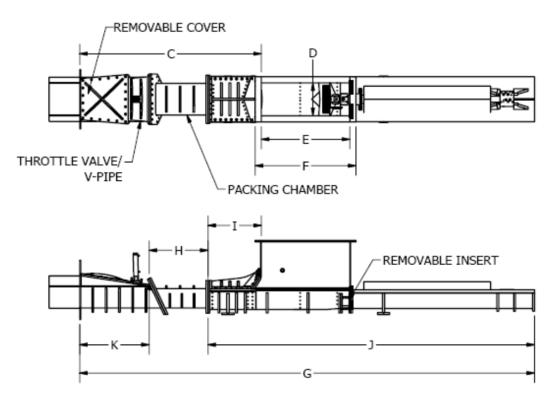

MODEL	Α	В	С	D	Е	F	G	Н	I	J	K
MSW16HU	20	36	111 ½	14	38 ½	44 ½	241	38	25 ½	155	48
MSW20HU	24 ½	44	119	17 ½	52 ½	59 ½	270	38	33	199	48
MSW24HU	29 ½	48 ½	122	21 ½	58	66	300	38	36	214	48
MSW30HU	35	56	136	27	58	66	326	38	50 ½	240	48

Due to product improvements, the manufacturer reserves the right to alter or amend, without notice, any of these specifications and/or dimensions.

V-RAM Processing, LLC d/b/a "V-RAM" 620 South Broadway, P.O. Box 289, Albert Lea, MN 56007

PHONE: 888-373-3996 FAX: 507-373-5937 Email: sales@vram.com

www.vram.com